

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 April 2009 (02.04.2009)

PCT

(10) International Publication Number
WO 2009/039632 A1

(51) International Patent Classification:

B65D 47/40 (2006.01) **B65D 83/00** (2006.01)
A47G 19/22 (2006.01) **B67D 5/30** (2006.01)
B65D 81/38 (2006.01)

(21) International Application Number:

PCT/CA2008/001682

(22) International Filing Date:

24 September 2008 (24.09.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/974,816 24 September 2007 (24.09.2007) US

(71) Applicant and

(72) Inventor: **DRUYAN, Eugene** [CA/CA]; 1 Royal Orchard Blvd., Apt. 1111, Thornhill, Ontario L3T 3C2 (CA).

(74) Agent: **BLANEY MCMURTRY LLP**; 2 Queen Street East, Suite 1500, Toronto, Ontario M5C 3G5 (CA).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,

EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report

(54) Title: CONTAINER FOR DISPENSING LIQUID DOSES

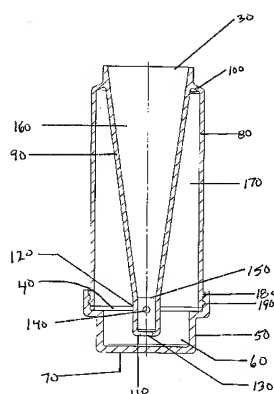


Fig. 2

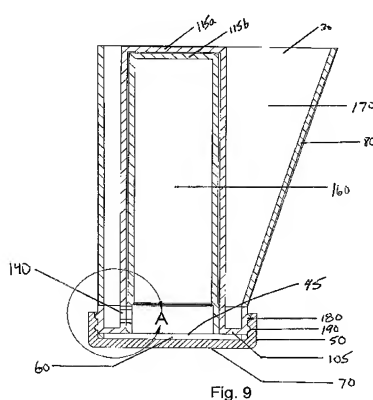


Fig. 9

(57) Abstract: The present invention relates to spill resistant container for dispensing liquid doses wherein the container includes a body of generally hollow form about a centre vertical axis with open ends, comprising: an liquid deposit chamber having an open first end and an opposing closed second end, a liquid withdrawal chamber having a open first end and an opposing closed second end, one or more apertures between said deposit and withdrawal chambers adapted to selectively permit liquid communication in controlled doses from the liquid deposit chamber to the liquid withdrawal chamber, a detachable base cap having a cavity in liquid communication with the liquid deposit and withdrawal chambers.



WO 2009/039632 A1

CONTAINER FOR DISPENSING LIQUID DOSES

FIELD OF THE INVENTION

[001] The present invention relates to the field of vessels or containers for liquids or beverages. More specifically, the present invention relates to the field of spill resistant, controlled sip or volume dosing containers, including containers which moderate the temperature of a beverage portion before withdrawal from the container.

BACKGROUND OF THE INVENTION

[002] A spill resistant drinking container is highly desirable in applications where there is an increased probability of spillage during drinking, such as in hospitals and nursing homes with debilitated patients, training cups for children, and in moving vehicles such as airplanes, boats, ships, trains and automobiles.

[003] Volume dosing is desirable in containers for hot beverages. A hot beverage, such as coffee, consumed at a temperature of greater than 80 degree Celsius has the potential to scald or otherwise damage the mouth and lips of a consumer. Solutions to this problem have included stirring the beverage or waiting for thermal radiation to decrease the beverage temperature to a comfortable level to allow consumption. Additionally, ice or a cooler consumable liquid such as water or milk is added to decrease the beverage temperature. Unfortunately, upon cooling a beverage to a comfortable consumption temperature, the beverage temperature quickly decreases until a hot beverage is below the optimal consumption temperature.

[004] A similar situation exists with cold beverages that have the potential to irritate sensitive dental structures or chill portions of the digestive tract to cause temporary cramps or pain.

[005] Volume dosing containers are also desirable for a user having difficulty in swallowing, which is referred to as dysphagia. There are currently millions of people diagnosed with dysphagia. A patient suffering from dysphagia may encounter medical complications, such as aspiration. Sometimes, when liquids enter the windpipe of a person who has dysphagia, coughing or throat clearing cannot remove it. Liquid that stays in the windpipe may enter the lungs and create a chance for harmful bacteria to

grow. A serious infection (aspiration pneumonia) can result. Dysphagia patients are therefore often put on restricted diets and asked to take small sips of liquid to prevent aspiration into their lungs.

5 **[006]** Many currently available children training cups are criticized for not being properly designed to train children to sip because of the valves used in such cups. While the valves prevent spillage, they make the children suck the beverage instead of sip it, which defeats the purpose of the training cup. In addition, many cups have a hard spout that increases risk of injury to the children's mouth and teeth when they carry the cup around.

10 **[007]** Travel beverage containers or mugs for hot beverages are known. Canadian Patent Application No. 2386384 discloses a beverage container with valve activated temperature moderated chamber. Examples of a "desk" mug with temperature insulated and temperature moderated container are disclosed in US Patent No. 5823380 and a limited flow cup is disclosed in Canadian Patent Application No. 2428592.

15 **[008]** Known travel mug designs typically include complex structures of valves and/or pump components and do not provide sip or volume dosing.

20 **[009]** Known spill/splash proof lid solutions include application and patents CA2219618, US5102000, CA2311058, US6076699, CA2425200, US5570797, US5150816, US5249703, US6568557, and US4438865. In such cups, the lid is usually equipped with some type of valve that allows the user to drink from the cup without removing the entire lid, or flow control solution. Tipping proof solutions are also as known; see for example US5454470 and US6520369.

25 **[0010]** The spill resistant container of the present invention permits dosing a liquid into small portions (the size of a sip). In the case of hot beverages, the small portion is isolated from the rest of the hot beverage, so that it quickly cools to a comfortable drinking temperature. The container keeps the majority of the beverage hot and prevents spillage. The container of the present invention is spill resistant, has no valves, pumps or springs, resulting in ease of use and less costly manufacturing costs.

SUMMARY OF THE INVENTION

[0011] The present invention advantageously provides a spill resistant container for dispensing liquid doses that is of relatively simple and inexpensive construction as compared to devices of similar functionality of the prior art.

5 **[0012]** The invention provides a container for dispensing liquid doses wherein the container includes a body of generally hollow form about a centre vertical axis with open ends, comprising: an liquid deposit chamber having an open first end and an opposing closed second end, a liquid withdrawal chamber having a open first end and an opposing closed second end, one or more apertures between said deposit and
10 withdrawal chambers adapted to selectively permit liquid communication in controlled doses from the liquid deposit chamber to the liquid withdrawal chamber, a detachable base cap having a cavity in liquid communication with the liquid deposit and withdrawal chambers. The liquid withdrawal chamber may be internal of the deposit chamber.

15 **[0013]** In one aspect, the liquid withdrawal chamber comprises a frusto-conical shaped first cup forming a dosing chamber dimensioned to contain a predetermined amount of liquid, wherein the dosing chamber extends below the liquid deposit chamber. The dosing chamber has a first aperture on the end wall thereof and a second aperture on the side wall thereof. The base cap cavity is in liquid communication with the first aperture and the liquid deposit chamber is in liquid communication with the
20 second aperture. The first and second apertures that may be circular or slits are in spaced apart relationship to define, in use, a pre-determined liquid dose.

[0014] In another aspect, the first aperture is circular and said second aperture is a slit positioned along the centre vertical axis of said first cup.

25 **[0015]** In a further aspect, the first aperture is circular and second aperture is a slit angled from the centre vertical axis of said first cup.

30 **[0016]** In a further aspect, a second cup is rotatably mountable to the end of the dosing chamber. The second cup has a first circular aperture on the end wall thereof in axial alignment with the first aperture of the dosing chamber and a second slitted aperture angled from the centre vertical axis of the second cup. The second aperture is angled relative to the slit of the dosing chamber, whereupon rotation of the second cup,

the slitted apertures define a moveable orifice for setting a predetermined volume of a liquid dose, typically 5.0 ml. to 50 ml.

[0017] In a further aspect container comprises a body having an outer side wall, an inner side wall positioned within the outer side, said inner side wall adjoins the outer side wall at the outer top edge region of the body and slopes in opposite direction with respect to the vertical to form a closed end cup extending below the outer side wall at the bottom region of the body, wherein an inner chamber with an open end at the top of the body and an outer chamber with an opposing open end are defined by the outer and inner walls, said cup having one or more apertures, a detachable base cap having a cavity in liquid communication with said inner and outer chambers, wherein said aperture is adapted to selectively permit fluid communication from the outer chamber to the inner chamber.

[0018] In a further aspect the container includes a body of generally hollow form about a centre vertical axis with open ends, comprising: an liquid deposit chamber having an open first end and an opposing closed second end, a liquid withdrawal chamber having a open first end and an opposing closed second end, one or more apertures between said deposit and withdrawal chambers adapted to selectively permit liquid communication in controlled doses from the liquid deposit chamber to the liquid withdrawal chamber, a detachable base cap having a cavity in liquid communication with the liquid deposit and withdrawal chambers. The liquid deposit chamber is internal the liquid withdrawal chamber.

[0019] Other advantages, features and characteristics of the present invention, as well as methods of operation and functions of the related elements of the structure, and the combination of parts and economies of manufacture, will become apparent upon consideration of the following detailed description and the appended claims with reference to the accompanying drawings, the latter of which are briefly described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The present invention may be further understood by reference to the description of the invention, taken in conjunction with the accompanying drawings, in which:

[0021] Figure 1 is a perspective view of a container according to one embodiment of the invention. Figure 1 is the container in the upright or dosing position.

[0022] Figure 2 is a cross-sectional view of the container of Figure 1 along line A-A of Figure 1. Figure 2 is the container in the upright position.

5 **[0023]** Figure 3 is an exploded elevation view of the container of Figure 1. Figure 3 is the container in the inverted or fill position.

[0024] Figure 4 is an exploded perspective view of a container according to an alternative embodiment showing a second cup. Figure 4 is the container in an inverted position.

10 **[0025]** Figure 5 is a partially exploded perspective view of the container of Figure 4 with a second cup in one adjustment position.

[0026] Figure 6 is a partially exploded perspective view of the container of Figure 4 with a second cup in another adjustment position.

15 **[0027]** Figure 7 is a perspective view of a container according to another embodiment of the invention. Figure 7 is the container in the upright or dosing position.

[0028] Figure 8 is a partially exploded perspective view of the container of Figure 7 in the inverted or fill position.

[0029] Figure 9 is a cross-sectional view of a container according to the alternative embodiment shown in Figure 7.

20 **[0030]** Figure 10 is an enlarged detail of portion A in Figure 9.

DETAILED DESCRIPTION OF THE INVENTION

25 **[0031]** The description, which follows, and the embodiments described therein, is provided by way of illustration of an example, or examples of particular embodiments of principles and aspects of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention.

[0032] Referring to Figures 1, 2, and 3 a container 10, shown in a first or upright position, includes a body 20 of generally hollow form about a vertical axis with an open

top end 30 and open bottom end 40 and a base cap 50 constructed to define a cavity 60 for holding liquid and to sealingly engage with body 20. As shown, the cap 50 includes a generally flat base 70. Optionally, a seal 55 may also be used.

[0033] The body 20 includes an outer side wall 80 and an inner side wall 90. The inner side wall 90 is shown having a generally frusto-conical shape but may equally be generally cylindrically or substantially cone shaped. The inner side wall 90 is positioned within the outer side wall and is sloped in opposite direction with respect to the vertical, such that inner wall 90 adjoins the outer side wall 80 at the outer top edge region 100 of the body 20 and at the opposing end forms a short, generally cylindrically shaped cup portion or dosing chamber 120 having a closed bottom end 110. The cup 120 extends axially beyond the outer side wall 80. The cup 120 has a first aperture 130 in bottom cup end wall 110 in liquid communication with cavity 60 and a second aperture 140 on the side wall of cup 120 in the area adjacent cup base portion 150. Apertures 120 and 130 are shown as circular but may be slits. In any configuration, the apertures are dimensioned generally according to the surface tensions of the liquids for which the container may be directed. The outer side wall 80 and inner side wall 90 thereby define an inner hollow space or chamber 160 and an outer hollow space or chamber 170. The inner chamber 160 has an open end 30 at the top of body 20 and a closed opposing end 110. The outer chamber 170 has an open end 40 at the bottom end of body 20 and is closed at the outer top edge region 100 of the body 20. The outer chamber 170 is in liquid communication with aperture 140. The outer side wall 80 in the area directly adjacent open end 40 includes a series of external screw threads 180. Screw threads 180 are connectable with the series of internal screw threads 190 formed on the base cap. Engagement of cap 50 to body 20 may be by threaded arrangement as shown, by friction fit (not shown), or other known manner of sealing engagement.

[0034] The volume of a single liquid dose is pre-determined by the volume of cup 120 and the relative position of second aperture 140 on the side wall of cup 120. The liquid dose volume will be less if aperture 140 is positioned closer to bottom cup wall 110. For dysphagia applications, the dose volume is typically 5 ml. to 20 ml. For travel container application, the dose volume is typically 20 ml. to 50 ml.

[0035] In operation, cap 50 is disengaged from body 20 and body 20 is rotated 180 degrees from the first position to a second or inverted position so that open end 40 of outer chamber 170 becomes an interim top opening of body 20. Liquid or fluid is poured

into outer chamber 170 to any desired level up to the edge of open end 40 and cap 50 is reattached to body 20.

[0036] Container 10 is then rotated 180 degrees to return to the first position. As container 10 rotates, liquid fills cavity 60 and air from inner chamber 160 enters into outer chamber 170 through aperture 140. The entering air causes liquid in outer chamber 170 to flow through aperture 130 into cup 120 until the level of liquid in cup 120 covers aperture 140. Once aperture 140 is covered by the liquid in cup 120, no further air enters the outer chamber 170 and no further liquid flows into cup 120. The amount of liquid in cup 120 represents a pre-determined, controlled dose of liquid that the user may drink through open first end 30 by tilting container 10.

[0037] Additional controlled doses of liquid equal to the first dose are obtainable by withdrawing liquid from inner chamber 160 by tilting the container and drinking from open end 30 or without tilting via use of a straw, followed by rotation of container 10 to the first position. Such process results in another equal dose of liquid for further consumption by the user. These process steps and controlled dosing are repeatable until no liquid remains in outer chamber 170.

[0038] Figures 4, 5, and 6 show an alternative embodiment wherein the liquid volume dose may be adjusted by the user. The container shown in the inverted position includes a body 20 of generally hollow form about a vertical axis with an open end 30 (not visible) at the top of container 10 and open end 40 at the bottom of the container. A base cap 50 is adapted to sealingly engage body 20. As shown, the cap 50 includes a generally flat base 70. The liquid cavity 60 of base cap 50 is not visible in this figure. The outer side wall 80 in the area directly adjacent open end 40 includes a series of external screw threads 180. Screw threads 180 are connectable with the series of internal screw threads 190 formed on the base cap.

[0039] In this embodiment, the body 20 of the container has an inner chamber 160 (not visible) and an outer chamber 170 defined in the same manner as the embodiment shown in Figures 1, 2 and 3. The inner side wall 90 (not visible) includes a short, generally cylindrically shaped cup portion or dosing chamber 120 having a closed bottom cup end wall 110 that extends axially beyond the outer side wall 80. Cup 120 has a circular aperture 130 in bottom cup end wall 110 and an angled slitted aperture 200 on the side wall of cup 120. A second cylindrically shaped cup 210 dimensioned to

rotatably engage over cup 120 includes a first circular aperture 220 on the second cup end wall 230 and a second angled, slitted aperture 240 on the side wall of second cup 210. The angle of slitted aperture 240 is approximately perpendicular relative to the angle of slitted aperture 200.

5 **[0040]** With cap 50 detached and second cup 210 in fitted arrangement over cup 120, circular aperture 220 of second cup 210 aligns with circular aperture 130 of cup 120 such that inner chamber 160 is in liquid communication with cavity 60. As second cup 210 is rotated about its axis, slitted aperture 240 intersects with slitted aperture 200 to define an intersecting aperture 250 having a distance "h" from the second cup bottom
10 end wall 230. Inner chamber 160 is thereby in fluid communication with outer chamber 170 via intersecting aperture 250.

[0041] Continued rotation of second cup 210 about its axis results in the re-position of intersecting aperture 250 relative to the end wall of second cup 210 and cup base portion 150, namely increasing or decreasing distance "h". A lower "h" value
15 corresponds to a smaller volume of dosed liquid and a higher "h" value corresponds to a larger volume of dosed liquid. The side wall of second cup 210 may optionally have volume amounts along the outer edge of slitted aperture 240.

[0042] Figures 7, 8, 9, and 10 show a further alternative embodiment wherein the liquid deposit chamber 160 is internal of the liquid withdrawal chamber 170. The body
20 has a skewed frusto-conical shape and includes an outer side wall 80 and an inner side wall 90 of vacuum walled construction comprised of walls 90a and 90b with a vacuum space 95 therebetween. This vacuum wall construction thermally insulates liquid in the liquid deposit chamber. Outer side wall 80 is substantially vertical on one side and slopes outwardly with respect to the vertical on the opposing side. The inner
25 wall 90 adjoins the outer side wall 80 at the bottom edge region 105 of the body 20 and at the opposing end forms a generally cylindrically liquid deposit chamber 160 having a closed top end 115 comprised of walls 115a and 115b. The deposit chamber 160 has an aperture 140 on the side wall of chamber 160 in the area adjacent open end 40. Apertures 140 may be a slit as shown or may be circular. In any configuration, the
30 aperture is dimensioned generally according to the surface tensions of the liquids for which the container may be directed.

[0043] The outer side wall 80 and inner side wall 90 thereby define an inner hollow space or chamber 160 and an outer hollow space or chamber 170. The outer chamber 170 has an open end 30 at the top of body 20 and a closed opposing end 105. The inner chamber 160 has an open end 45 at the bottom end of body 20 and is closed at top wall 115. The outer chamber 170 is in liquid communication with aperture 140. The outer side wall 80 in the area directly adjacent bottom edge region 105 includes a series of external screw threads 180. Screw threads 180 are connectable with the series of internal screw threads 190 formed on the base cap. Engagement of cap 50 to body 20 may be by threaded arrangement as shown, by friction fit (not shown), or other known manner of sealing engagement.

[0044] In operation, cap 50 is disengaged from body 20 and body 20 is rotated 180 degrees from the first position to a second or inverted position so that open end 45 of inner chamber 160 becomes an interim top opening of body 20. Liquid or fluid is poured into inner chamber 160 to any desired level up to the bottom of aperture 140 and cap 50 is reattached to body 20.

[0045] Container 10 is then rotated 180 degrees to return to the first position. As container 10 rotates, air from outer chamber 170 enters into inner chamber 160 through aperture 140. The entering air causes liquid in inner chamber 160 to flow through aperture 140 into outer chamber 170 until the level of liquid covers aperture 140. Once aperture 140 is covered by the liquid outer chamber 170, no further air enters the inner chamber 160 and no further liquid flows into outer chamber 170. The amount of liquid in outer chamber 170 represents a pre-determined, controlled dose of liquid that the user may drink through open first end 30.

[0046] Additional controlled doses of liquid equal to the first dose are obtainable by withdrawing liquid from inner chamber 160 by tilting the container and drinking from open end 30 or without tilting via use of a straw.

[0047] A typical construction of the container and its elements of the present invention would normally be a rigid plastic material but other materials may be equally suitable for different applications. The container may be constructed of ceramic, porcelain, glass, metal, clay, paper, or combinations thereof.

[0048] The container may optionally be constructed of thermal insulating materials or have vacuum walls to maintain the contained liquid at a desired temperature (either hot or cold).

5 **[0049]** The container may also optionally have one or more external handles mounted or pre-formed on the external body wall.

[0050] It will be understood that various changes, modifications and adaptations may be made by those having ordinary skill in the art without departing from the spirit of the invention or the scope thereof as set out by the claims that follow.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

- 5 1. A container for dispensing liquid doses wherein the container includes a body of generally hollow form about a centre vertical axis with open ends, comprising: an liquid deposit chamber having an open first end and an opposing closed second end, a liquid withdrawal chamber having a open first end and an opposing closed second end, one or more apertures between said deposit and withdrawal chambers adapted to selectively permit liquid communication in controlled doses from the liquid deposit chamber to the liquid withdrawal chamber, a detachable base cap having a cavity in liquid communication with the liquid deposit and withdrawal chambers.
- 10 2. A container of claim 1 wherein the open end of liquid deposit chamber and the open end of the liquid withdrawal chamber are situate at opposite ends of the body.
- 15 3. A container of claim 2 wherein the liquid withdrawal chamber is internal of the deposit chamber.
- 20 4. A container of claim 3 wherein the liquid withdrawal chamber comprises a frusto-conical shaped first cup forming a dosing chamber dimensioned to contain a predetermined amount of liquid, wherein said dosing chamber extends below the liquid deposit chamber.
- 25 5. A container of claim 4, wherein said dosing chamber has a first aperture on the end wall thereof and a second aperture on the side wall thereof.
6. A container of claim 5, wherein said base cap cavity is in liquid communication with the first aperture and the liquid deposit chamber is in liquid communication with the second aperture.
7. A container of claims 5 or 6 wherein said first and said second apertures are in spaced apart relationship to define, in use, a pre-determined liquid dose.
8. A container of claims 5, 6, or 7 wherein said apertures are circular.

9. A container of claims 5, 6, or 7 wherein said first aperture is circular and said second aperture is a slit positioned along the centre vertical axis of said first cup.
10. A container of claims 5, 6, or 7 wherein said first aperture is circular and second aperture is a slit angled from the centre vertical axis of said first cup.
- 5 11. A container of claims 9 or 10 wherein the volume of the dosing chamber is adjustable in order to set a predetermined volume of liquid.
12. A container of claim 10 further comprising a second cup rotatably mountable to the end of said dosing chamber, said second cup having a first circular aperture on the end wall thereof in axial alignment with the first aperture of the dosing
10 chamber, a second slitted aperture angled from the centre vertical axis of said second cup and angled relative to the slit of the dosing chamber, whereupon rotation of the second cup, the slitted apertures define a moveable orifice for setting a predetermined volume of a liquid dose.
13. A spill resistant container for dispensing liquid doses, comprising: a body having
15 an outer side wall, an inner side wall positioned within the outer side, said inner side wall adjoins the outer side wall at the outer top edge region of the body and slopes in opposite direction with respect to the vertical to form a closed end cup extending below the outer side wall at the bottom region of the body, wherein an inner chamber with an open end at the top of the body and an outer chamber with
20 an opposing open end are defined by the outer and inner walls, said cup having one or more apertures, a detachable base cap having a cavity in liquid communication with said inner and outer chambers, wherein said aperture is adapted to selectively permit fluid communication from the outer chamber to the inner chamber.
- 25 14. A container of claim 13 wherein the inner chamber comprises a frusto-conical shaped first cup forming a dosing chamber dimensioned to contain a predetermined amount of liquid, wherein said dosing chamber extends below the inner chamber.
- 30 15. A container of claim 14, wherein said dosing chamber has a first aperture on the end wall thereof and a second aperture on the side wall thereof.

16. A container of claim 15, wherein said base cap cavity is in liquid communication with the first aperture and the inner chamber is in liquid communication with the second aperture.
- 5 17. A container of claims 15 or 16 wherein said first and said second apertures are in spaced apart relationship to define, in use, a pre-determined liquid dose.
18. A container of claims 15, 16, or 17 wherein said apertures are circular.
19. A container of claims 15, 16, or 17 wherein said first aperture is circular and said second aperture is a slit positioned along the centre vertical axis of said first cup.
- 10 20. A container of claims 15, 16, or 17 wherein said first aperture is circular and second aperture is a slit angled from the centre vertical axis of said first cup.
21. A container of claims 19 or 20 wherein the volume of the dosing chamber is adjustable in order to set a predetermined volume of liquid.
- 15 22. A container of claim 21 comprising a second cup rotatably mountable to the end of said dosing chamber, said second cup having a first circular aperture on the end wall thereof in axial alignment with the first aperture of the dosing chamber, a second slitted aperture angled from the centre vertical axis of said second cup and angled relative to the slit of the dosing chamber, whereupon rotation of the second cup, the slitted apertures define a moveable orifice for setting a predetermined volume of a liquid dose.
- 20 23. A container of claim 11, 12, 21 or 22 wherein the volume of a liquid dose may be set between about 5 ml. to 50 ml.
24. A container of claims 1 to 12 or 13 to 23 wherein the container is comprised of thermal insulated materials.
- 25 25. A container of claims 1 to 12 or 13 to 23 wherein the container comprises vacuum walls for thermal insulation.
26. A container of claims 1 to 12 or 13 to 23 further comprising one or two external handles.
27. A container of claims 1 to 12 or 13 to 23 further comprising a lid.

28. A container of claim 1 wherein the liquid deposit chamber is internal the liquid withdrawal chamber.
29. A container of claim 28 wherein said liquid deposit chamber has a first aperture on the side wall thereof situate proximate the open end of said chamber.
- 5 30. A container of claim 29 wherein said aperture is a slit positioned along the centre vertical axis of said chamber.
- 10 31. A method of dispensing a predetermined amount of liquid within a container as recited in claims 1 to 12 or 13 to 30, comprising the steps of: a) rotating the container 180 degrees about its axis from a first position; b) detaching the base cap from the body; c) filling said liquid deposit chamber with liquid to any fill level; d) attaching the base cap to the body; d) rotating the container 180 degrees about its axis to return to the first position, thereby dispensing a predetermined volume of liquid into said liquid withdrawal chamber for drinking by a user.
- 15 32. A method of dispensing a predetermined amount of liquid within a container as recited in claims 11, 12, 21 or 22, comprising the steps of: a) rotating the container 180 degrees about its axis from a first position; b) detaching the base cap from the body; c) rotating said second cup to a set dose volume; d) filling said liquid deposit chamber with liquid to any fill level; e) attaching the base cap to the body; f) rotating the container 180 degrees about its axis to return to the first position, thereby dispensing a predetermined volume of liquid into said liquid withdrawal chamber for drinking by a user.
- 20 33. A method of dispensing a predetermined amount of liquid within a container as recited in claims 11, 12, 21 or 22 comprising the steps of: a) rotating the container 180 degrees about its axis from a first position; b) detaching the base cap from the body; c) filling said liquid deposit chamber with liquid to any fill level; d) attaching the base cap to the body; d) rotating the container 180 degrees about its axis to return to the first position, thereby dispensing a predetermined volume of liquid into said liquid withdrawal chamber for drinking by a user, wherein said predetermined volume of liquid is determined by the rotational orientation of the second cup about the first cup.
- 25 30

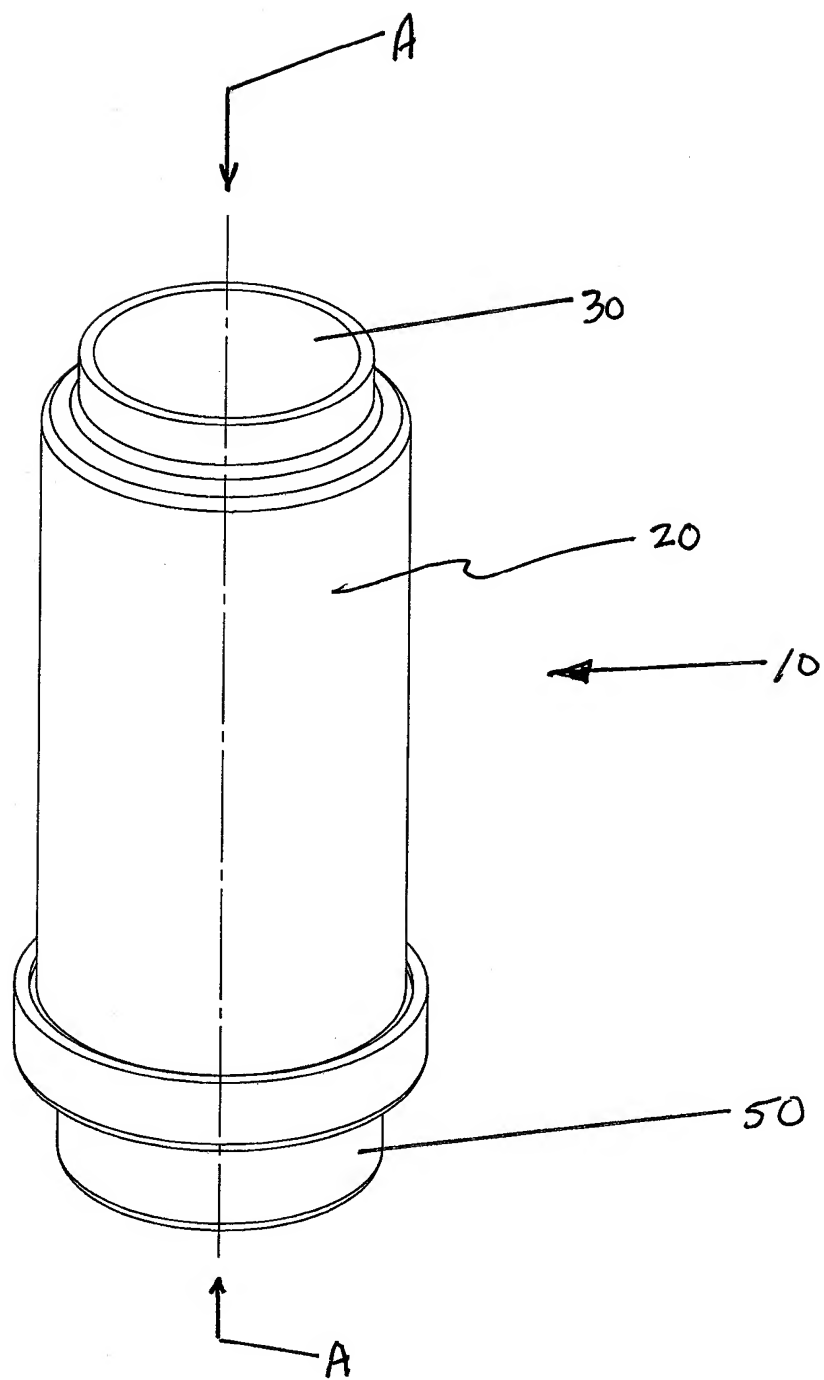


Fig. 1

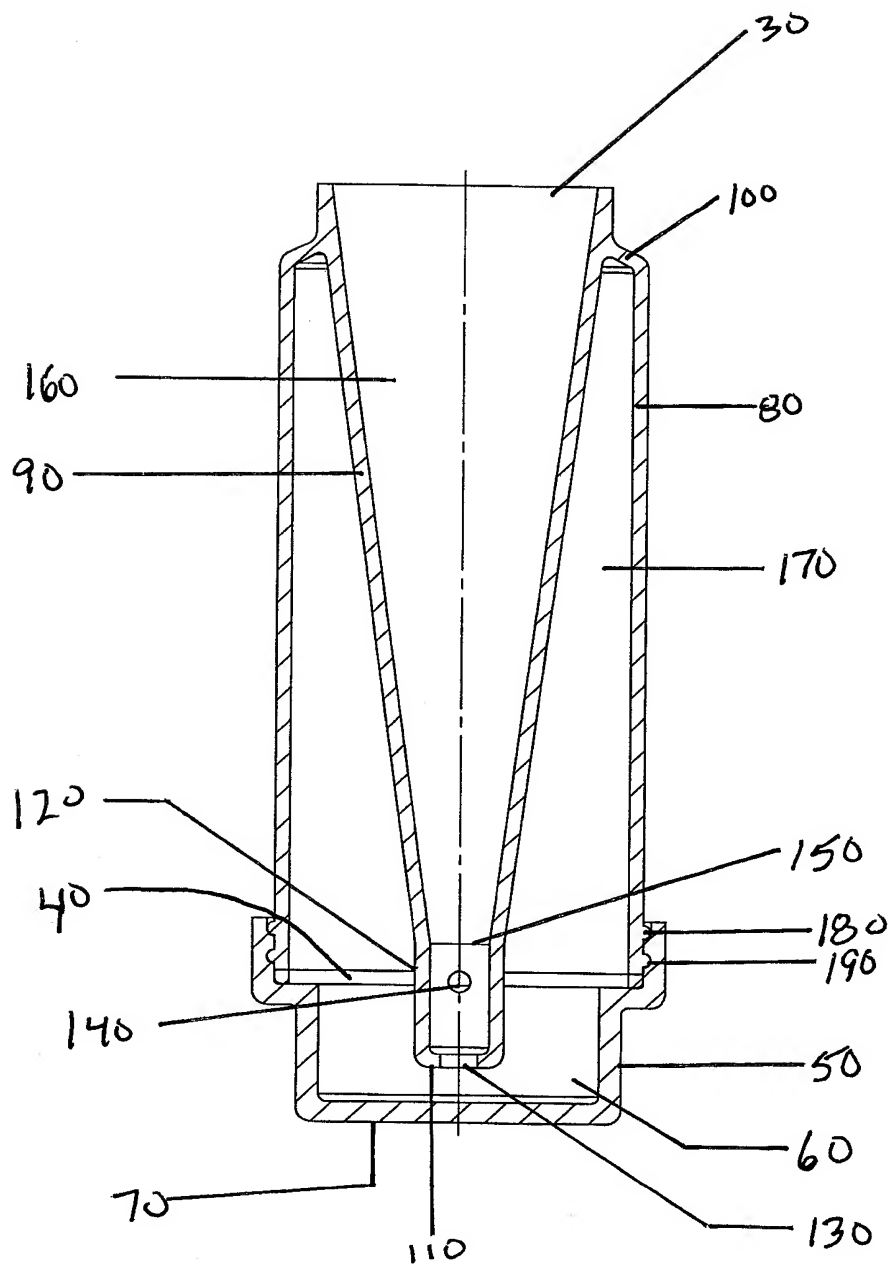


Fig. 2

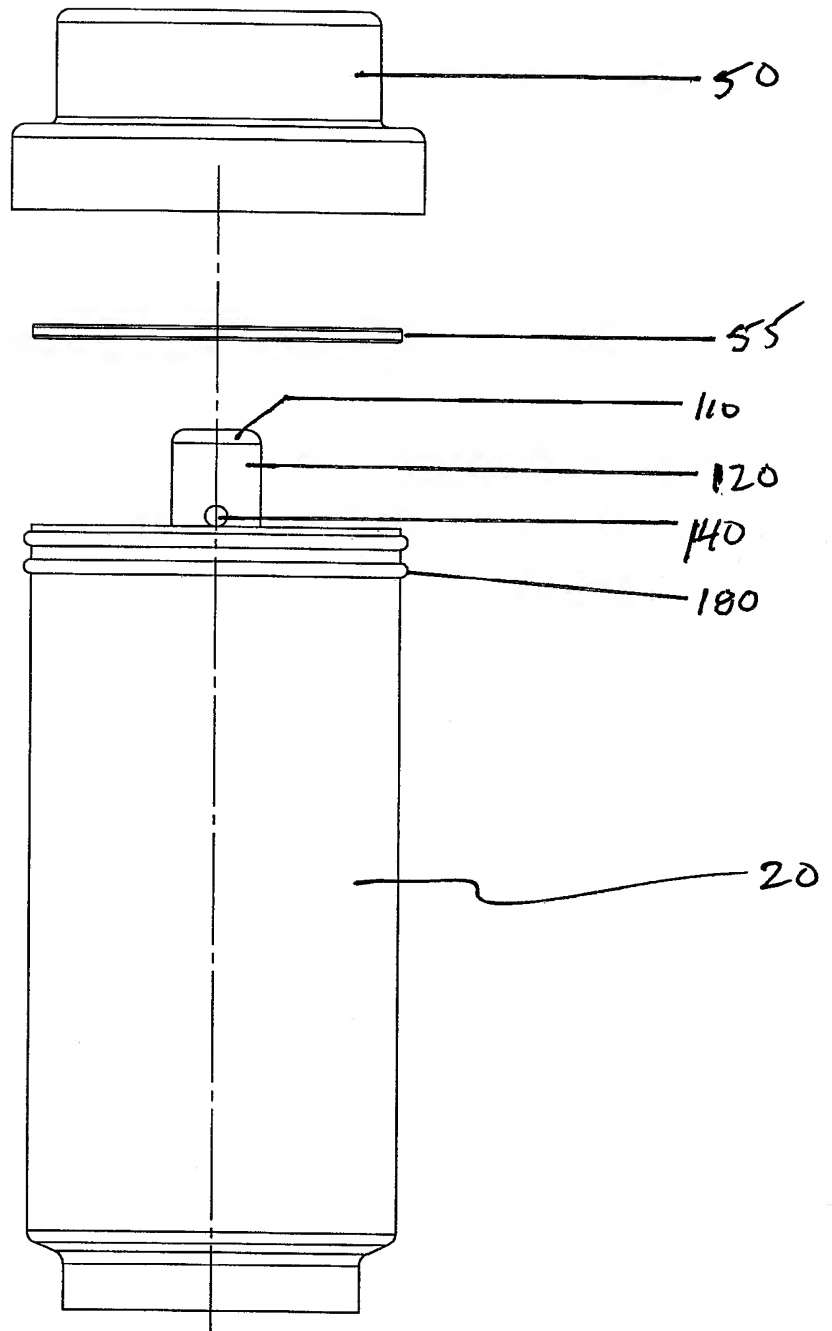


Fig. 3

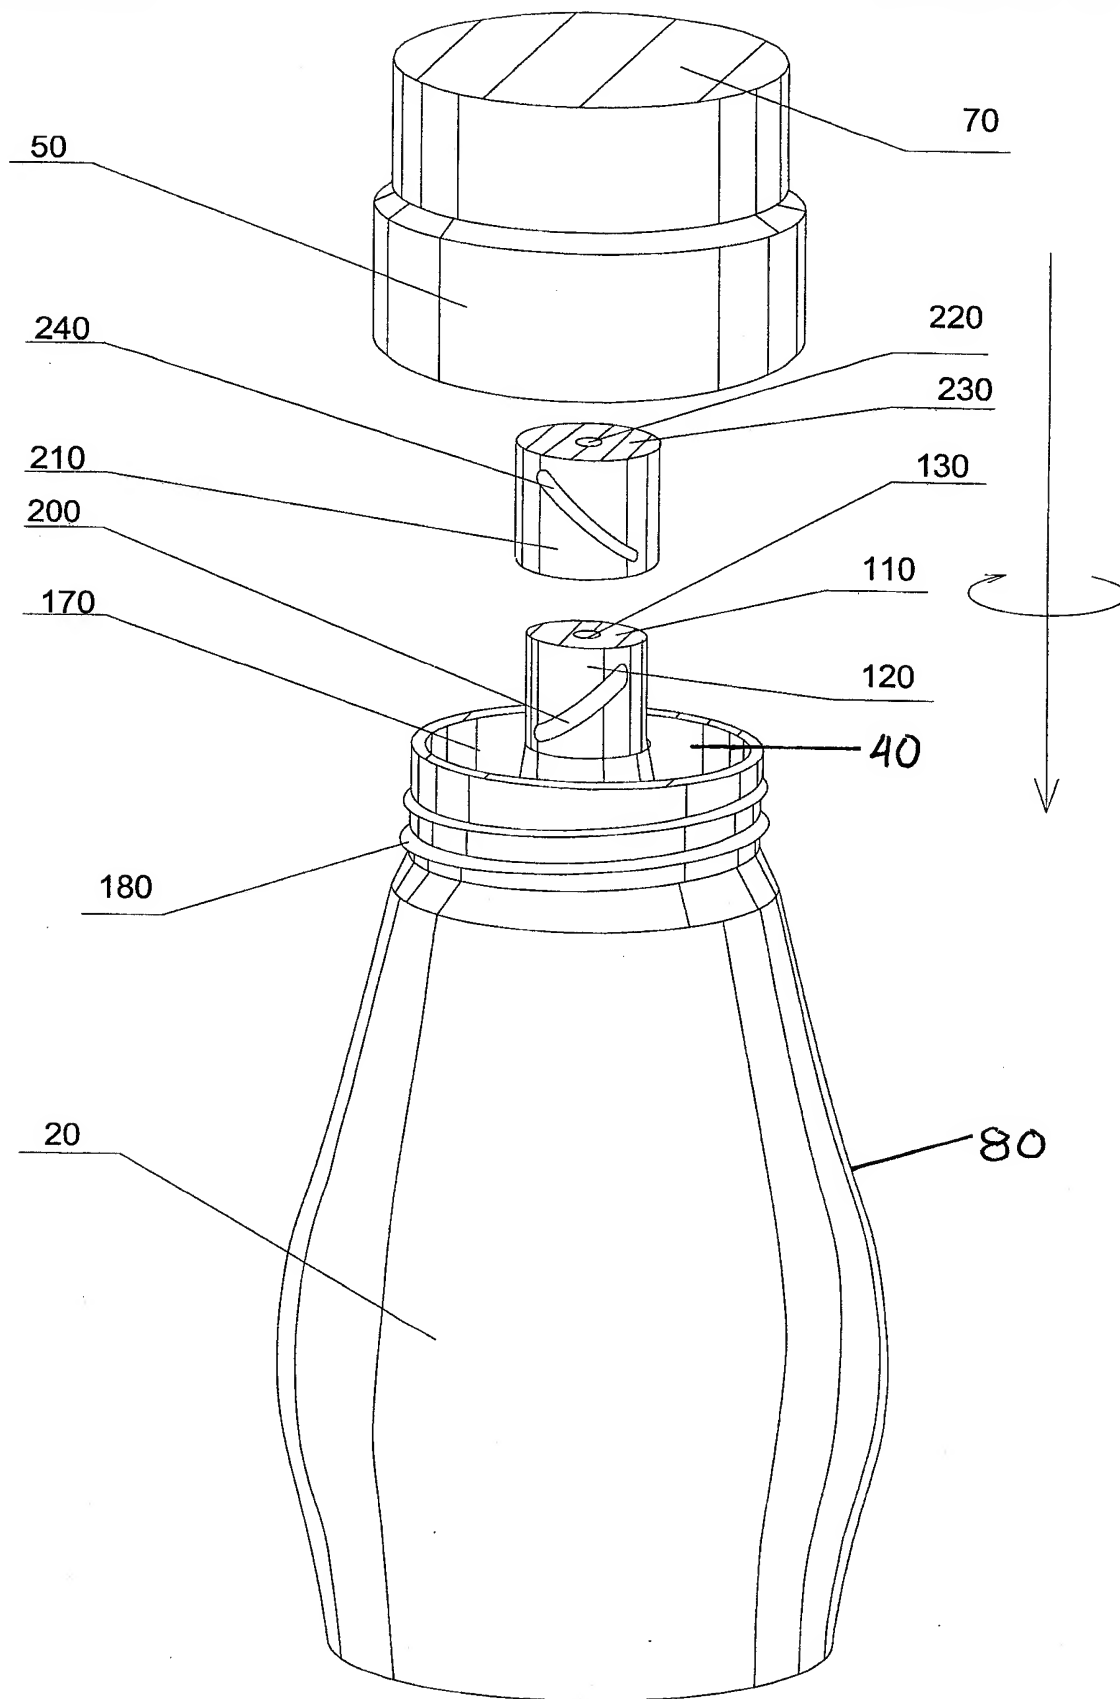


Fig. 4

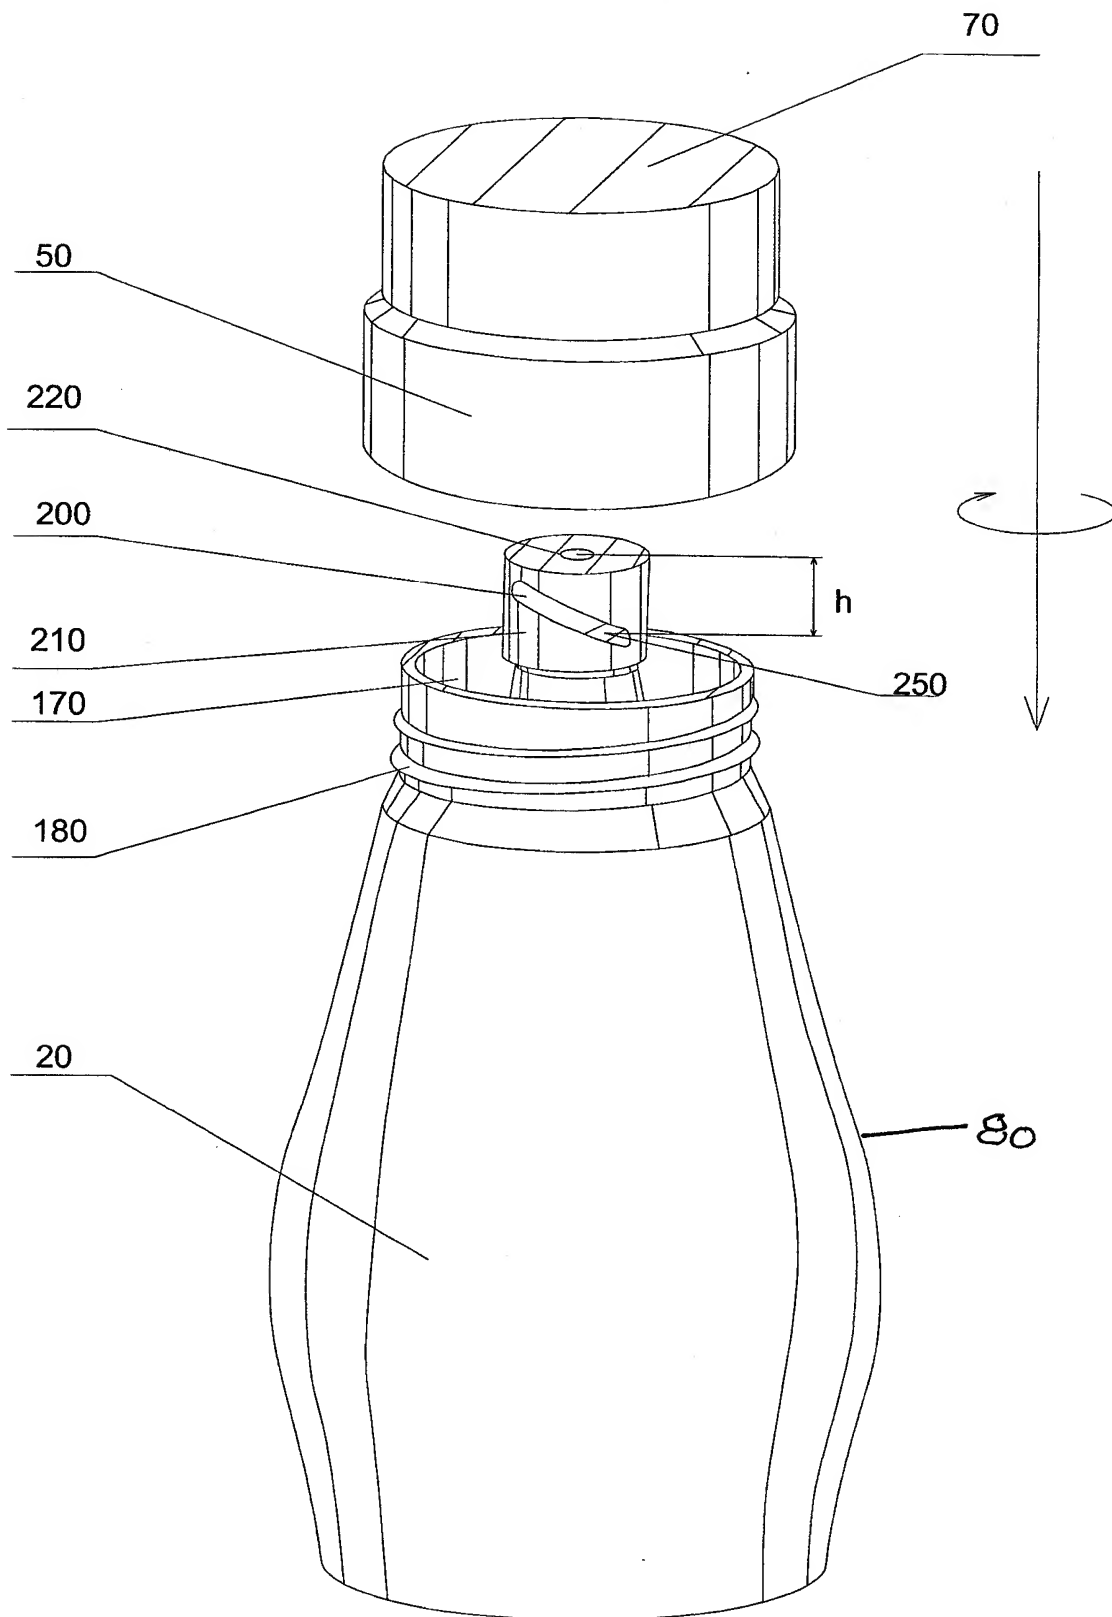


Fig. 5

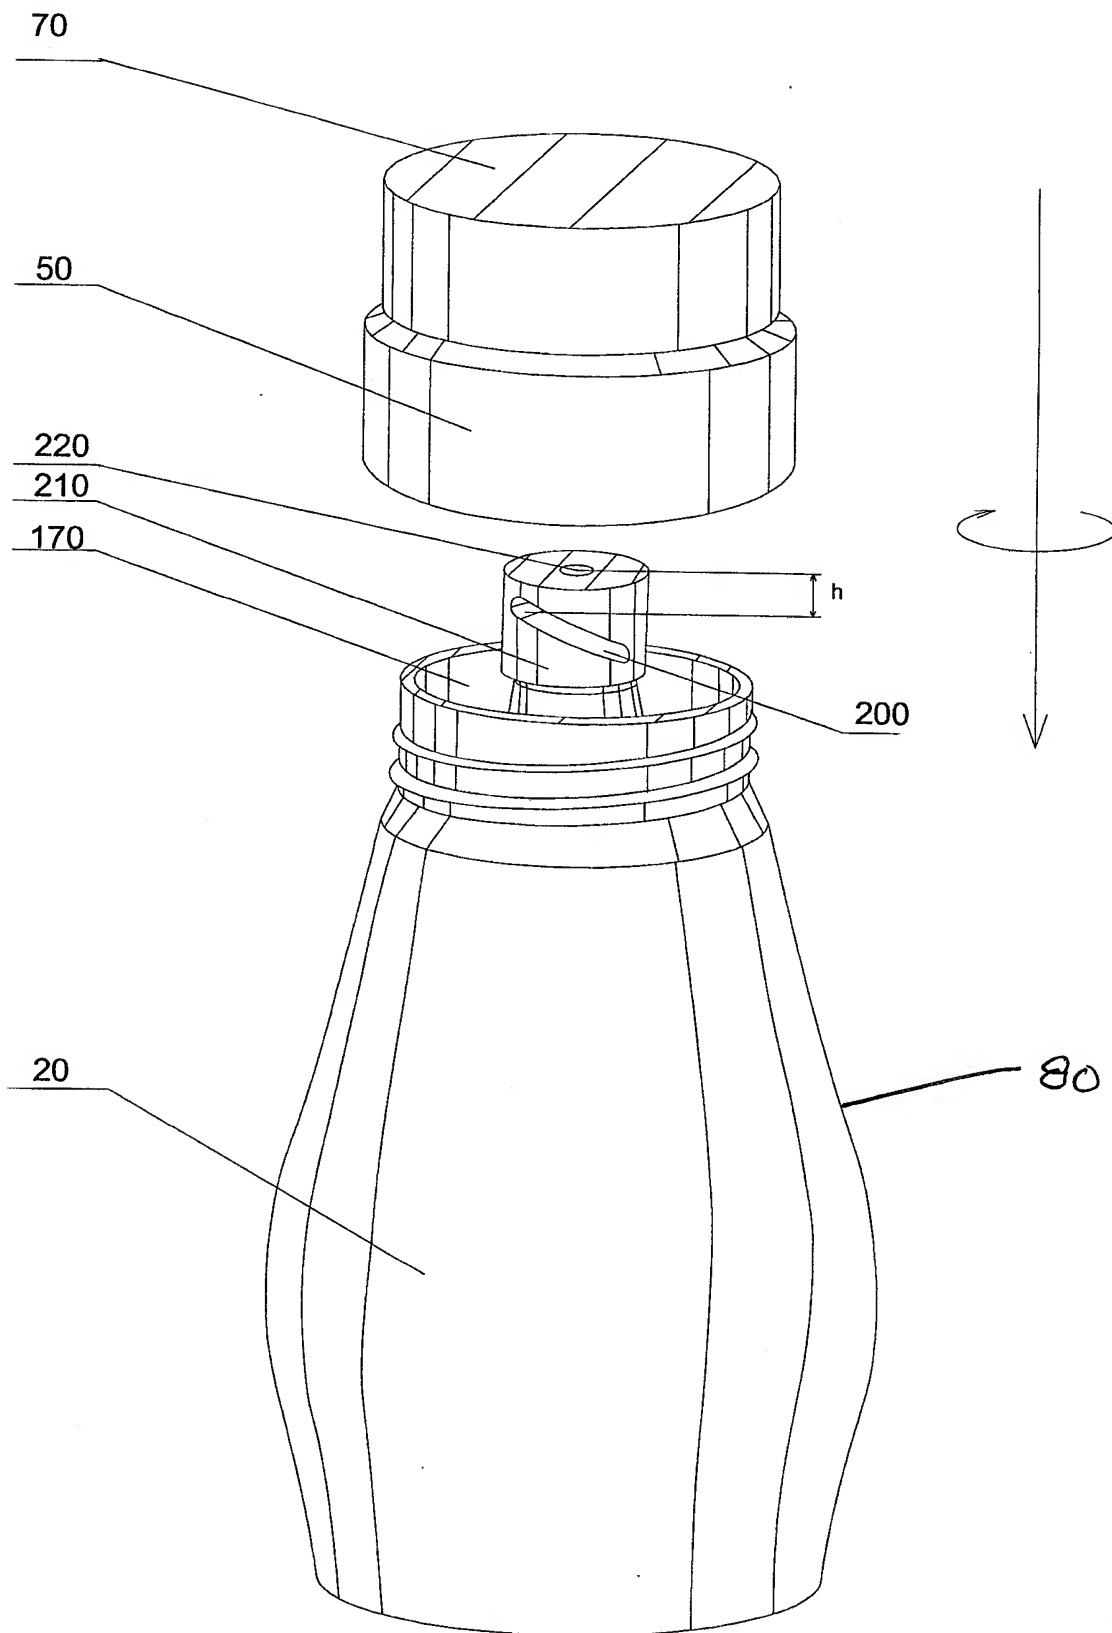


Fig. 6

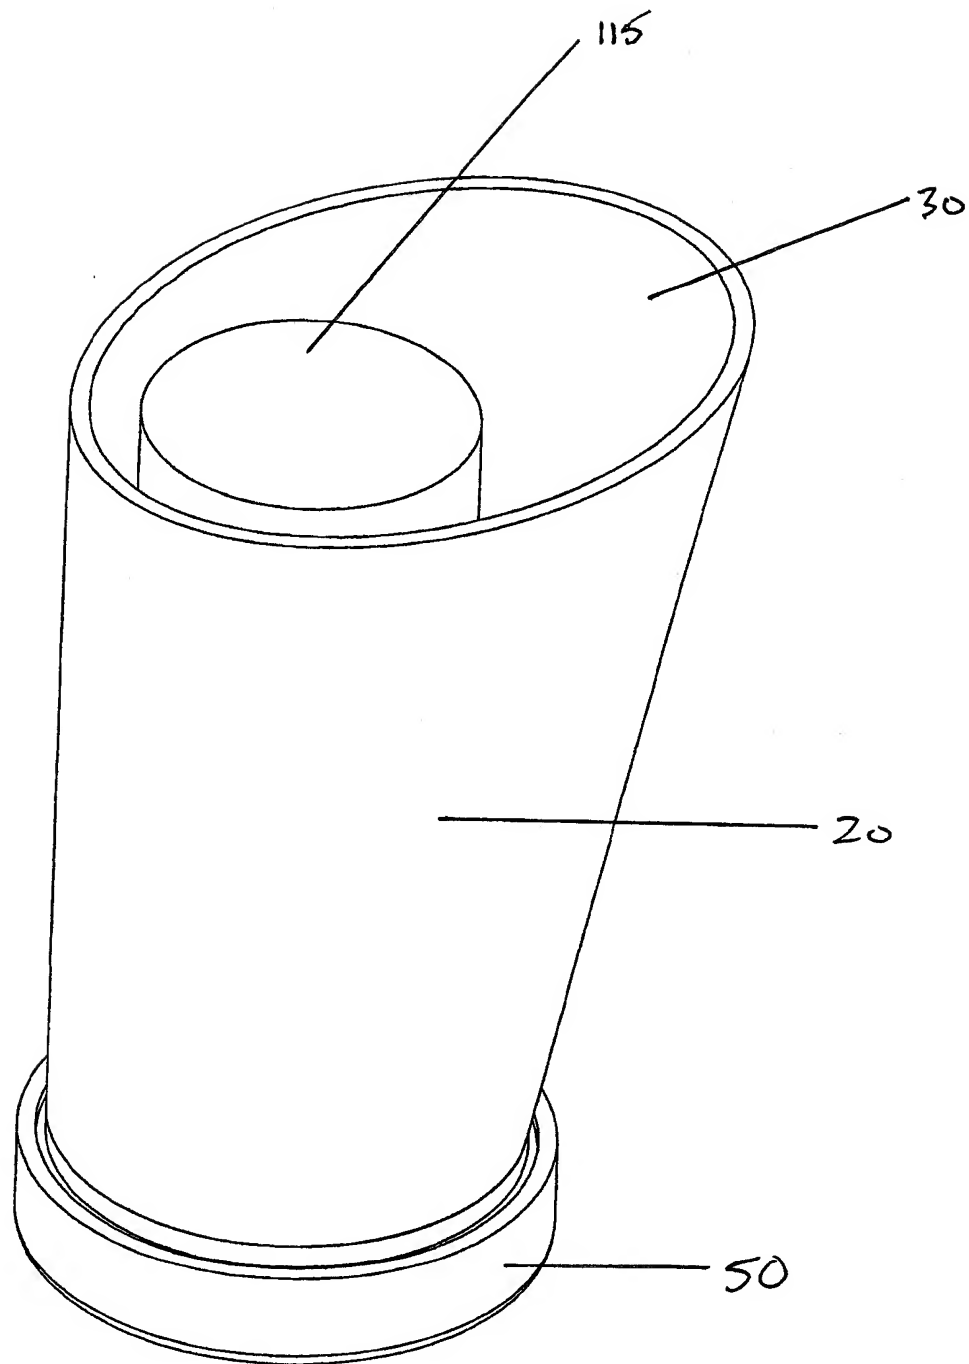


Fig. 7

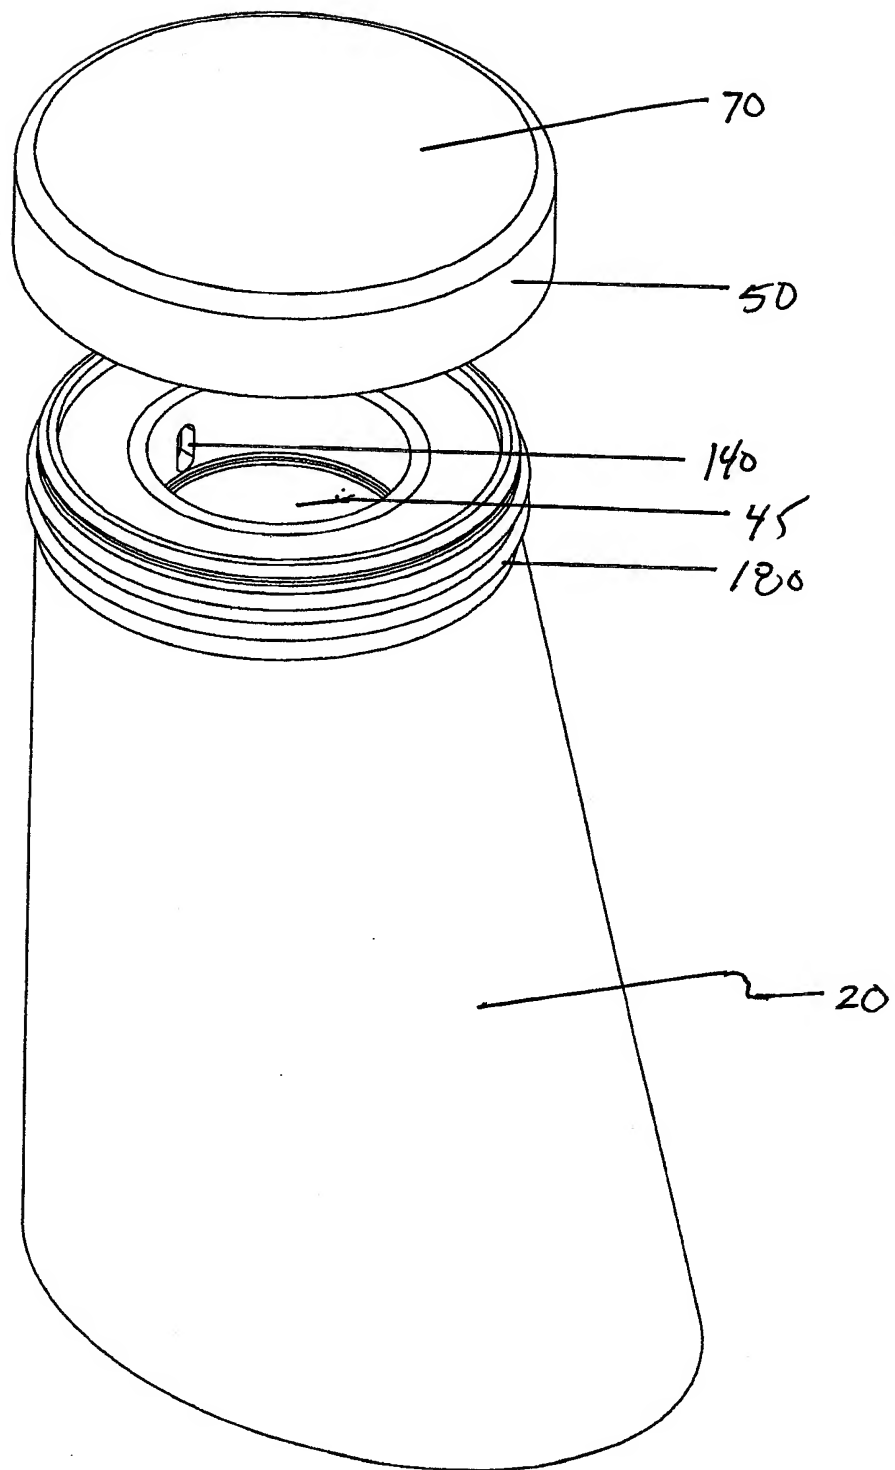


Fig. 8

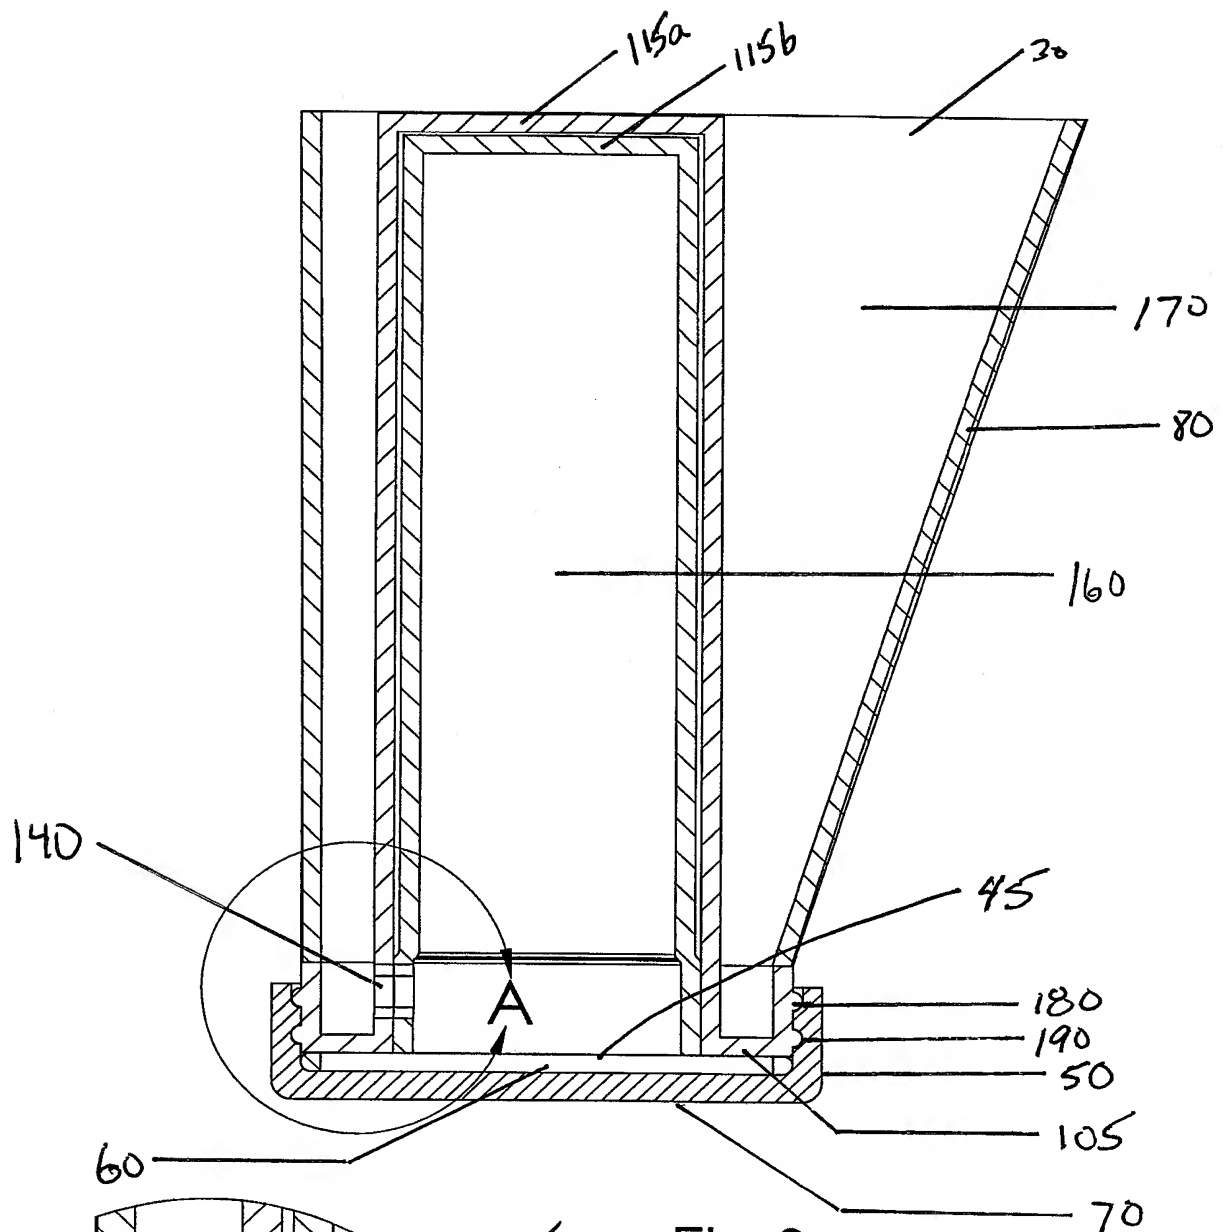


Fig. 9

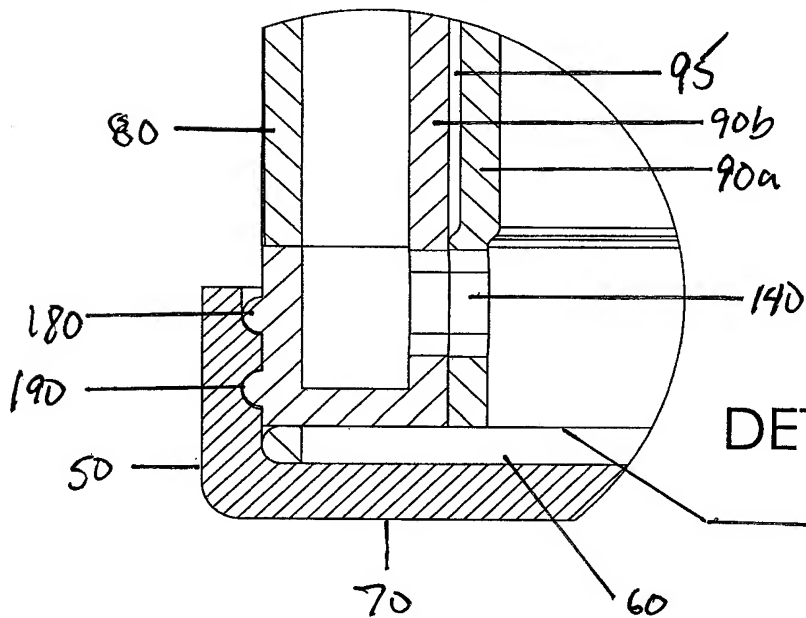


Fig. 10
DETAIL "A"

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2008/001682

A. CLASSIFICATION OF SUBJECT MATTER IPC: <i>B65D 47/40</i> (2006.01) , <i>A47G 19/22</i> (2006.01) , <i>B65D 81/38</i> (2006.01) , <i>B65D 83/00</i> (2006.01) , <i>B67D 5/30</i> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC: <i>B65D 47/40</i> (2006.01) , <i>A47G 19/22</i> (2006.01) , <i>B65D 81/38</i> (2006.01) , <i>B65D 83/00</i> (2006.01) , <i>B67D 5/30</i> (2006.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Delphion, ESP@CENET, QPAT, USPTO, CANADIAN PATENT DATABASE, JAPAN PATENT OFFICE (keywords: dispenser, container, dose, meter, chamber)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US5497916 A (HESTER, K. D.) 12 March 1996 (12-03-1996) *the entire document*	1-10, 13-20, 23, 24, 26, 27, 31 25
Y	US5579946 A (ROWAN, D. et al.) 3 December 1996 (03-12-1996) *the entire document*	25
A	US4424921 A (FEUERSTEIN, A. E. et al.) 10 January 1984 (10-01-1984) *the entire document*	1-33
A	US2693301 A (ALLEN, W.M., JR.) 2 November 1954 (02-11-1954) *the entire document*	1-33
A	US1270262 A (BUCKLAND, A. L.) 25 June 1918 (25-06-1918) *the entire document*	1-33
A	US3224652 A (LADWIG, A. J. et al.) 21 December 1965 (21-12-1965) *the entire document*	1-33
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 9 January 2009 (09-01-2009)	Date of mailing of the international search report 13 January 2009 (13-01-2009)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer Gregory Myslicki 819- 956-5824	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2008/001682

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US1952558 A (MILLER, G. S.) 27 March 1934 (27-03-1934) *the entire document*	1-33
A	US2373551 A (DE LAUDER, L. R.) 10 April 1945 (10-04-1945) *the entire document*	1-33
A	US3172580 A (MACKEY, R. C.) 9 March 1965 (09-03-1965) *the entire document*	1-33
A	US4828149 A (HESTER, K. D.) 9 May 1989 (09-05-1989) *the entire document*	1-33
A	US5405055 A (HESTER, K. D.) 11 April 1995 (11-04-1995) *the entire document*	1-33
A	US6755318 B2 (BURKE, A. et al.) 29 June 2004 (29-06-2004) *the entire document*	1-33

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2008/001682

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US 5497916A	12-03-1996	US 5405055A	11-04-1995
US 5579946A	03-12-1996	None	
US 4424921A	10-01-1984	None	
US 2693301A	02-11-1954	None	
US 1270262A	25-06-1918	None	
US 3224652A	21-12-1965	None	
US 1952558A	27-03-1934	None	
US 2373551A	10-04-1945	None	
US 3172580A	09-03-1965	None	
US 4828149A	09-05-1989	WO 9010199A1	07-09-1990
US 5405055A	11-04-1995	US 5497916A	12-03-1996
US 6755318B2	29-06-2004	AT 362721T	15-06-2007
		AT 372706T	15-09-2007
		AU 3527502A	21-05-2002
		AU 2002340199A1	31-12-2003
		CA 2428592A1	16-05-2002
		CA 2489400A1	24-12-2003
		DE 60130481D1	25-10-2007
		DE 60130481T2	12-06-2008
		DE 60220324D1	05-07-2007
		DE 60220324T2	17-01-2008
		EP 1341430A2	10-09-2003
		EP 1341430A4	02-11-2005
		EP 1341430B1	12-09-2007
		EP 1551259A1	13-07-2005
		EP 1551259A4	26-10-2005
		EP 1551259B1	23-05-2007
		US 2003019876A1	30-01-2003
		US 2005178775A1	18-08-2005
		WO 0238012A2	16-05-2002
		WO 0238012A3	29-08-2002
		WO 03105636A1	24-12-2003